


W76320

Active Infra-Red mini barrier for (outdoor) protection of doors and windows, height 0.5 m, range up to 6 m, black

Overview

The WINGUARD infrared mini-barriers are unobtrusive multiinfrared transmitter/receiver units housed in robust aluminium housings, which are one and two metres high respectively. With their 6 metre range, they are ideal for outdoor perimeter protection of windows and doors. The small dimensions of the Tx and Rx units (only 23mm wide), makes them suitable for installation just on the outside of windows and doors. Both transmitter and receiver are supplied with approximately 2 metre screen cable to simplify installation. Winguard are fitted with 4 twin active infrared beams, Which are synchronized and controlled by a microprocessor. The alarm is activated when one of the beams is obscured by an object with at least a 10mm diameter for a duration of 90 milliseconds.

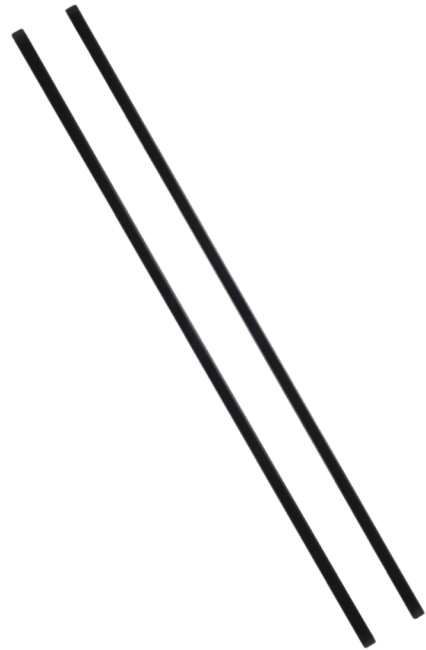

W76320

Active Infra-Red mini barrier for (outdoor) protection of doors and windows, height 0.5 m, range up to 6 m, black

Technical specifications

General

| | |
|-----------------|-----------------------------------|
| Category | Active Infrared Beams |
| Product type | Active Infrared Beam |
| Infrared system | four 7-twin active infrared beams |

Detection

| | |
|-------|--------------------------|
| Range | up to 6 m (height 0.5 m) |
|-------|--------------------------|



As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 9:33